
General Bed 25000 EC1



Positions

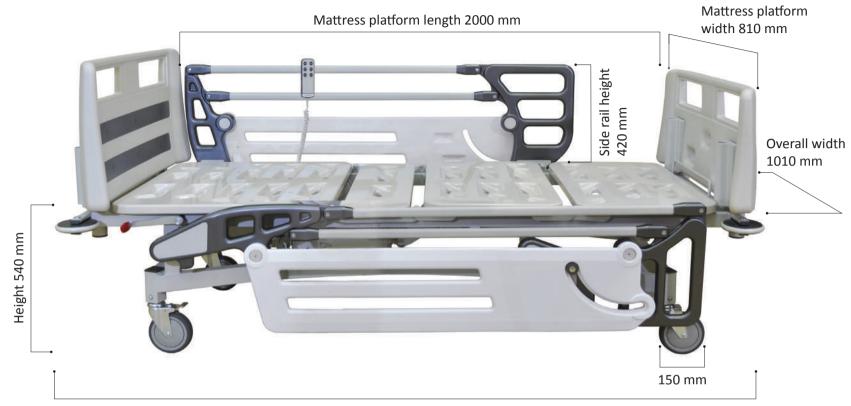

Overall length 2250 mm

Technical Specifications

Mattress platform	2250 mm × 1010 mm 2000 mm × 810 mm
HeightSide rail height Sack rest angle	420 mm
Knee rest angle Bed weight Safe working load	110 kg

asters	150 mm	Technical and Quality
ower input max	250 VA	Assurance Standards
lain power system	220 V-50 Hz, 24V DC	IEC 60601- 252
lectrical current protection	Class I	ISO 13485
lectrical shock protection	Туре В	ISO 9001
peration mode	10%, max.: 2 min/18 min	ISO 14971
Prating	IP 66	



















Features





Bed Ends

The seamless blow molded bed ends of 25000 EC1 are lightweight, durable, and easy to clean. Since the bed ends are of high quality, they are compatible for steam cleaning. In order to have a better access to patient's head in emergency cases, the caregiver can easily remove the bed ends by grasping the hand holds and lifting them up in one single step. Moreover, the bed ends have integrated steel fittings which make them extremely rigid; so the nursing staff can move the bed by holding and pushing them without worries.



Pendant Control

User friendly handset control with illustrative schematics makes it simple and easy for the patient and caregiver to adjust the back and knee rest positions.

The pendant controller can be placed on both side rails for easy access.



Mattress Platforms

The ABS mattress platforms of this general bed are produced by injection molding method. These platforms have some remarkable features such as smooth surfaces, high durability, and easy to remove for cleaning and disinfection. Plus, the mattress platforms are compatible for steam cleaning.



Actuators

All positions of this bed are achieved by powerful, reliable, and low noise actuators.

As the actuators have IP66 rating, they are protected against ingression of dust and water. This prominent feature of actuators makes it easy to clean and disinfect the bed in the medical centers on a regular basis.



Side Rails

A unique and stylish design of parallel side rails combines blow molded plastic parts and steel bars to provide a protective height and length. The side rails adhere to the highest standards of safety to prevent patient fall and entrapment.



Casters

150 mm casters run extremely smoothly; the quality that makes it significantly easy for the nursing staff to transport the bed in the medical centers. Having diagonal locks, the casters can be locked in order to prevent the bed from unintended movement.



Bumpers

Innovative rotary bumpers which are located on four corners of 25000 EC1 can prevent to a large extent the damages that may occur due to unwanted collision of the bed to the surroundings during transportation.



Urine Bag Holder

Urine bag holders can be easily installed on either side of the bed in one step.